



Maximum Performance



UU030, UU035, UU055

FEATURES AND BENEFITS

- Easy to use timer
- Electrical, gas and steam heating
- Large door opening for easy loading and unloading (UU030, UU035 Ø 57 cm, UU055 Ø 68 cm)
- Galvanized drum
- Axial airflow
- Large lint filter

OPTIONS


- Stainless steel drum
- Stainless steel front panel
- Full OPL microprocessor
- Reversing drum
- Residual moisture control:
 - Lower energy and utility costs
 - Lower linen replacement costs
- Fire suppression system

TUMBLE DRYERS

| TYPE | | UU030 | UU035 | UU055 |
|---------------------------|--------|---|---------------|----------------|
| CAPACITY | | | | |
| Capacity | kg/lb | 13/30 | 16/35 | 24/55 |
| Drum volume | l | 270 | 350 | 490 |
| Drum diameter | Ø mm | 673 | 762 | 838 |
| AIRFLOW | | | | |
| Airflow | l/s | 240 | 280 | 330 |
| DRYING AVERAGE | | | | |
| Gas heating | g/min | 267 | 349 | 485 |
| Electric heating | g/min | 258 | 340 | 371 |
| MOTOR | | | | |
| Fan | kW | 0,4 | 0,4 | 0,4 |
| Drive | kW | 0,2 | 0,2 | 0,4 |
| GAS HEATING | | | | |
| Energy | kW | 21,4 | 26,4 | 32,8 |
| Energy | kBTU/h | 73 | 90 | 112 |
| Electrical connection | | 1×100-120V/50-60Hz, 1×200-240V/50-60Hz, 3×200-240V/50-60Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz | | |
| Gas connection | inch | ½" | ½" | ½" |
| STEAM HEATING | | | | |
| High pressure 6,9 bar | kW | 24,47 | 30,3 | - |
| | kBTU/h | 83,5 | 103,4 | - |
| Electrical connection | | 1×100-120V/50-60Hz, 1×200-240V/50-60Hz, 3×200-240V/50-60Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz | | |
| Steam connection | inch | ¾" | ¾" | - |
| ELECTRICAL HEATING | | | | |
| Energy | kW | 21 | 24 | 27 |
| Electrical connection | | 1×200-208V/50-60Hz, 3×200-208V/50-60Hz, 1x 230-240V/50-60Hz, 3x 230-240V/50-60Hz, 3x 380V/50-60Hz, 3x400-415V/50-60Hz, 3x 440V/50-60Hz, 3x 460-480V/50-60Hz | | |
| Exhaust | Ø mm | 150 | 200 | 200 |
| DIMENSIONS | | | | |
| H×W×D | mm | 1625×710×1155 | 1625×800×1155 | 1700×925×1350 |
| Net weight (E) | kg | 150 | 160 | 200 |
| Net weight (G,S) | kg | 145 | 155 | 195 |
| TRANSPORT DATA | | | | |
| Packed (foil) H×W×D | mm | 1720×760×1240 | 1720×840×1240 | 1790×900×1450 |
| Gross weight (foil, E) | kg | 160 | 170 | 220 |
| Gross weight (foil,G,S) | kg | 155 | 165 | 215 |
| Packed (crate) H×W×D | mm | 2210×880×1320 | 2210×950×1320 | 2210×1020×1520 |
| Gross weight (crate, E) | kg | 220 | 230 | 300 |
| Gross weight (crate,G,S) | kg | 214 | 220 | 295 |

SIDE UU030, UU035, UU055

BACK UU030, UU035, UU055

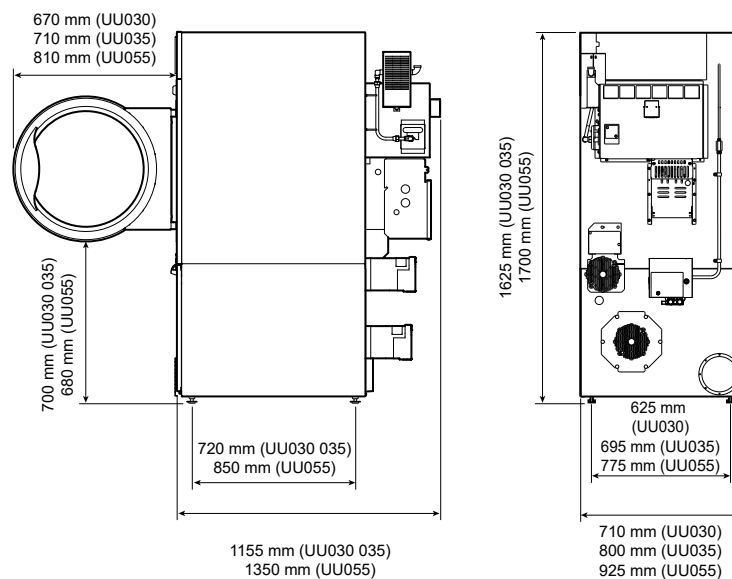

TO LEARN MORE, OR TO FIND A DISTRIBUTOR IN YOUR AREA, VISIT UNIMAC.COM
ALLIANCE LAUNDRY SYSTEMS - SHEPARD ST, RIPON WI 54971 - +1 800 587 5458

Consult your UniMac® distributor for details. For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

©2018 Alliance Laundry Systems LLC.

UniMac® by Alliance Laundry Systems