



Maximum Performance



UDR190

FEATURES AND BENEFITS


- Standard stainless steel drum with large diameter
- Easy-to-use microprocessor (ECT)
- Innovative bulged drum
- Combination of radial and axial airflow
 - maximal heat transfer
 - low energy consumption
 - short drying time
- Large door opening for easy loading and unloading

OPTIONS

- Reversing drum
- Full control programmer
- Residual moisture control:
 - Safe drying of delicate linen
 - Humidity detection in %
 - Ideal for fire departments
 - Available on Easy and Full Control
- Stainless steel front

INDUSTRIAL TUMBLE DRYER

TYPE		UDR190
CAPACITY		
Capacity	kg	9
Drum volume	l	190
Drum diameter	Ø mm	760
DRYING PERFORMANCE		
Airflow	l/s	350
Drying average	l/min	0,150
MOTOR		
Fan	kW	0,37
Drive	kW	0,18
GAS HEATING		
Energy	kW	12,5
Energy	kBTU/h	42,7
Electrical connection		3x380-415V 50/60Hz, 3x220-240V 50Hz, 3x208-240V 60Hz, 3x440V 60Hz
Gas connection	inch	3/4"
ELECTRICAL HEATING		
Energy	kW	9/12
Electrical connection		3x380-415V 50/60Hz, 3x220-240V 50Hz, 3x208-240V 60Hz, 3x440V 60Hz, 3x480V 60Hz
CONNECTION		
Exhaust	mm	Ø150
PROGRAMMER		
Easy Control with antivandal (ECT)		Standard
Full Control		Available
DIMENSIONS		
H×W×D	mm	1465 x 795 x 815
Net weight	kg	170
TRANSPORT DATA		
Packed H×W×D	mm	1570 x 880 x 885
Gross weight	kg	180

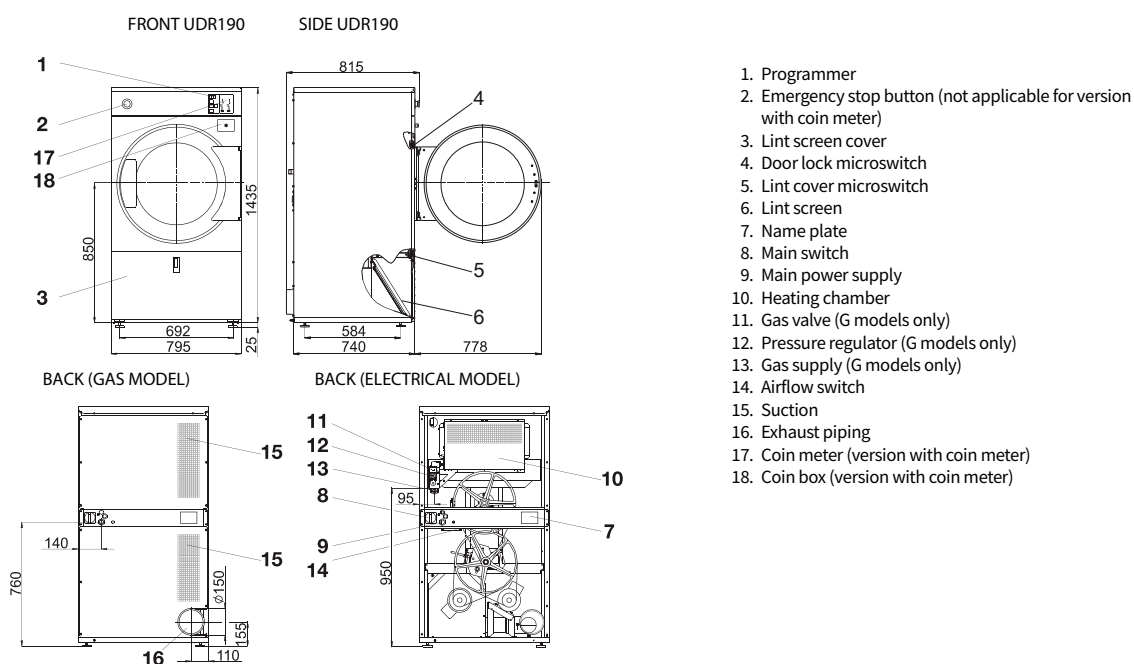

TO LEARN MORE, OR TO FIND A DISTRIBUTOR IN YOUR AREA, VISIT UNIMAC.COM
ALLIANCE LAUNDRY SYSTEMS - SHEPARD ST, RIPON WI 54971 - +1 800 587 5458

Consult your UniMac® distributor for details. For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems® Ripon facility has been registered to ISO 9001:2008.

©2020 Alliance Laundry Systems LLC.

UniMac® by Alliance Laundry Systems